

LEO 24GT Tracked Access Platform


True Performance TEUPEN LEO 24GT. Only 98 cm passing width make access through single standard doors quick and easy. With 250 kg platform capacity in the entire working area the LEO24GT has an unrestricted outreach of 12,00 m. That is always enough capacity to take two persons including tools or material: No compromises and unrivalled in this height segment.

Key Features

- ✓ Only 98 cm passing width make access through single standard doors quick and easy
- ✓ Innovative boom technology
- ✓ Intuitive control system
- ✓ The track drive with non-marking rubber tracks provides easy, precise manoeuvring and protects sensitive flooring
- ✓ High-performance stabiliser system
- ✓ The platform is detachable to decrease the transport length, 180° rotatable and corner-mounted to turn into confined corners.
- ✓ Dual power source



Working Height	24m
Basket Floor Height	22m
Outreach	12m
Turret Rotation	180°
Basket Dimensions	1.10m x 1.40m x 0.70m
Max Working Load	250kg
Length in Stowed Position	6.4m
Min. Stowed Width	0.98m
Min. Stowed Height	1.99m
Outriggers Footprint	Max 4700mm x 4700mm
Driving Speed	2,0 km/h
Petrol Engine (Vanguard)	16hp
Electric Motor	230v
Max Gradeability	16,7 ° / 30,0 %
Max Lateral Gradeability	19/34°
Total Weight	3300kg
Ground Tracks Load	5.06 kn/m2
Max Pressure On Ground (Working Condition)	1.72 kn/m2
OPTIONS	
Diesel Engine (Kubota)	14.5hp
Battery drive (lead acid)	48v

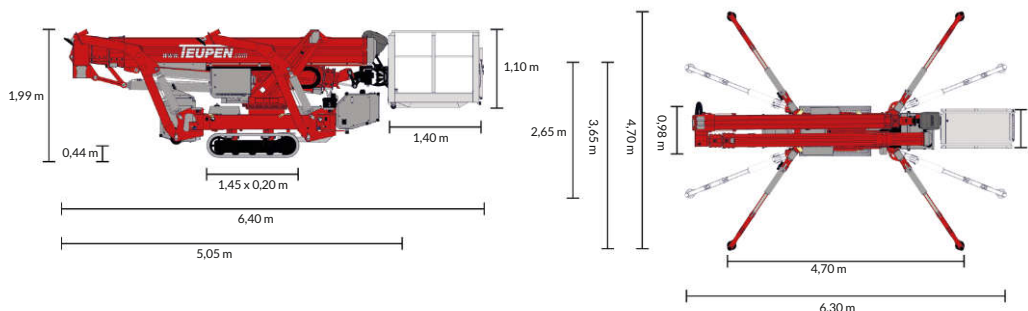

Tracked Access Platforms LTD

- ✓ Access Platform Hire
- ✓ Mini Crane Hire
- ✓ IPAF Qualified Demonstrators & Operators
- ✓ Training
- ✓ Window Cleaning
- ✓ Gutter Cleaning & Inspections
- ✓ Building Facade Restoration & Surveys
- ✓ Hi Level Internal Cleaning
- ✓ Pressure Washing
- ✓ Graffiti & Gum Removal
- ✓ ACO Drain Cleaning
- ✓ Snow Ploughing & Gritting Services

1 Corban street, Bradford, BD48RH



All measurements and weights are approximate and refer to the standard basic execution. Technical alterations reserved.

LEO 24GT Working Envelope

